


# A T INDUSTRIAL SLUDGE VACUUM WATER/SLUDGE FILTRATION SYSTEM

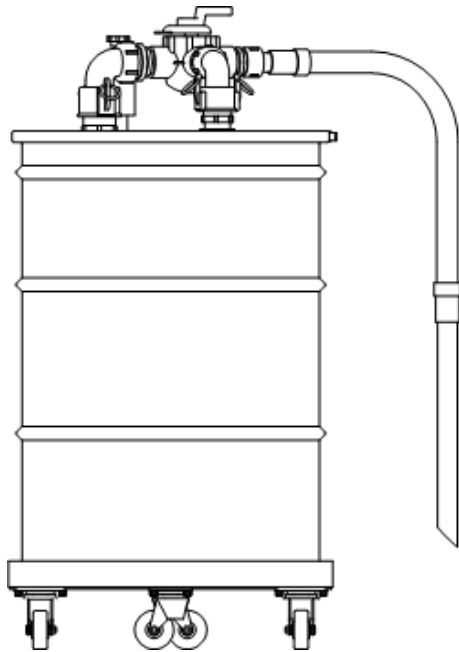

**Sludge VACUUM F55  
Water/Sludge Filtration System**

## SLUDGE VACUUM WATER/SLUDGE FILTRATION SPECIFICATIONS AND FEATURES:

- Coated steel filtration tank with removable head
- Reversible air powered vacuum pump (19 cfm @ 80 psi; 30 gpm)
- 1/4" air regulator/filter
- 1/4" ball valve
- 25 micron (smaller micron available) x 7" x 32" polypropylene felt filter assembly
- spare 25 micron polypropylene felt filters
- 10' x 1.5" vacuum hose
- Cam and groove connectors for easy maintenance
- Two piece angled vacuum wand
- Vacuum tool head
- System dolly

### NOT INCLUDED

- Compressed air hose
- Compressed air hose couplings
- Air supply

*Specifications subject to change without notice.*

## SLUDGE WRANGLER SIZES:

MODEL	OVERALL DIMENSIONS	TANK CAPACITY	RECOMMENDED USE
F30	30"W x 28"D	26"W x 24"D	C3-800, C3-1200
F55	36"W x 28"D	32"W x 24"D	C3-800, C3-1200, C5-1800, C5-2500
F100	36"W x 36"D	32"W x 24"D	C7-3000, C15-5000



**a t industrial products**

909.593.8340

www.ATIndustrialProducts.com